

SETTING UP SCAN TO NETWORK FOLDER ON OKI ES5462

1 - OBTAIN THE IP ADDRESS OF YOUR COPIER

ON THE COPIER


PRESS THE SETTINGS BUTTON

THEN SCROLL DOWN TO VIEW INFORMATION

THEN NETWORK

NOTE THE IPV4 ADDRESS

2 - OPEN UP YOUR WEB BROWSER (MUST BE FROM A PC THAT IS CONNECTED TO THE SAME NETWORK) AND TYPE THE IP ADDRESS INTO THE ADDRESS BAR

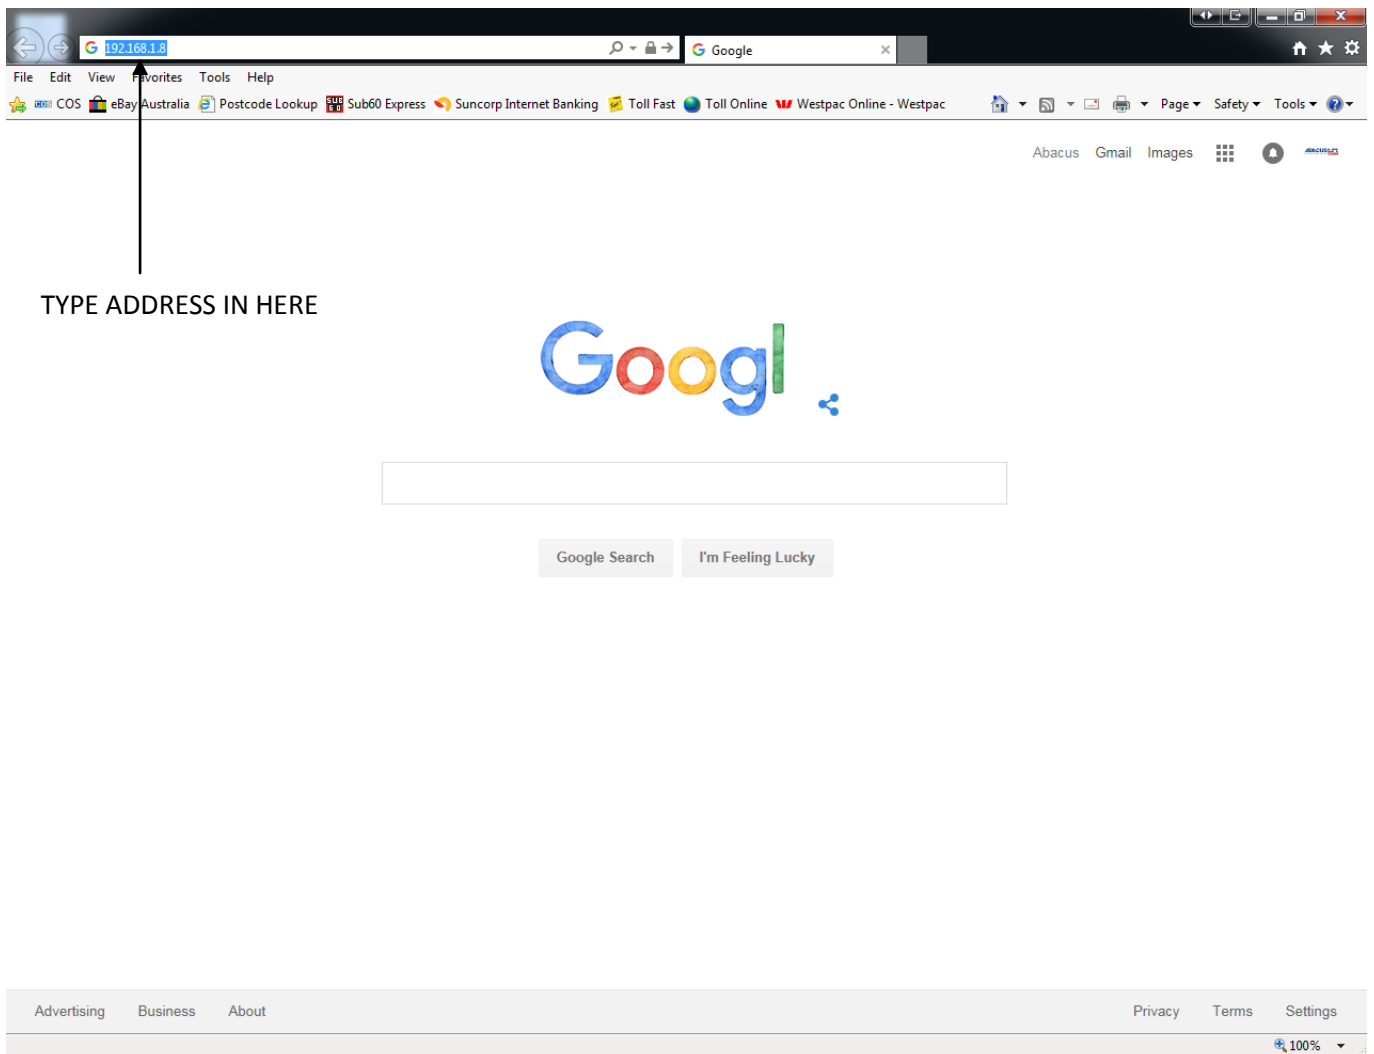

The image shows a screenshot of a web browser window. The address bar at the top contains the IP address "192.168.1.8". Below the address bar, the Google logo is displayed in its characteristic multi-colored font. A search input field is visible below the logo, and two buttons labeled "Google Search" and "I'm Feeling Lucky" are positioned below the search field. An arrow points from the text "TYPE ADDRESS IN HERE" to the address bar. The browser's menu bar and toolbar are also visible at the top of the window.

TYPE ADDRESS IN HERE

3 - YOU WILL NOW SEE THE FOLLOWING SCREEN

OKI

ES5462 MFP Refresh

[View Info](#) | [Direct Print](#) | [Links](#)

View Information

- Status
- Counter
- Supplies Life
- Network
- System

[Administrator Login](#)

Information

Device Name	OKI-ES5462MFP-86239D
IP Address	192.168.1.11
MAC Address	00:25:36:86:23:9D
Location	
Serial Number	AK28062208
Asset Number	
Contact Name - Administrator	
Tray1	Letter
MP Tray	A4
Duplex	Installed
SD Memory Card	Installed
Memory	256 MB

Version Information

CU	02.37
PU	00.07.09
Network Firmware	01.06
Web Remote	01.00
Web Language	01.00

Remaining Toner :

Black:	<div style="width: 100%;"></div>	100%
Cyan:	<div style="width: 70%;"></div>	70%
Magenta:	<div style="width: 70%;"></div>	70%
Yellow:	<div style="width: 70%;"></div>	70%

Print Service Enabled

LPR	<input checked="" type="checkbox"/>
Port9100	<input checked="" type="checkbox"/>
FTP	<input type="checkbox"/>
IPP	<input type="checkbox"/>
NetWare PServer	<input type="checkbox"/>
NetWare RPrinter	<input type="checkbox"/>
EtherTalk	<input type="checkbox"/>
NetBEUI	<input type="checkbox"/>

Setting Service Enabled

SNMP	<input checked="" type="checkbox"/>
WEB	<input checked="" type="checkbox"/>
Telnet	<input type="checkbox"/>
NetBEUI	<input type="checkbox"/>

Copyright ©2011 Oki Data Corporation. All rights reserved.

4 - CLICK ON ADMINISTRATOR LOGIN

5 - ENTER THE USERNAME AND PASSWORD (default settings are username: admin password: aaaaa) AND CLICK OK

6 - IF THIS SCREEN APPEARS SCROLL DOWN AND CLICK SKIP OTHERWISE PROCEED TO NEXT STEP

OKI

ES5462 MFP

Setup

This is the first login to the Device web page.
If you would like to perform basic setup of the device, please complete the fields, and press "OK". Otherwise press "SKIP".

Identification

Device Name	<input type="text" value="OKI-ES5462MFP-86239D"/> (Max.31 characters)
<small>This is the devices identity on the network (sysName, and Device Name).</small>	
The Device Name can be applied to the following by checking the boxes:	
<input type="checkbox"/>	NetWare Print Server Name
<input type="checkbox"/>	NetWare Printer Name
<input type="checkbox"/>	EtherTalk
Short Device Name	<input type="text" value="ES5462M-86239D"/> (Max.15characters)
<small>A maximum of 15 characters can be used (alpha/numeric characters and "-" are acceptable.)</small>	
Location	<input type="text"/> (Max.255 characters)
Asset Number	<input type="text"/> (Max.32 characters)
Contact Name - Administrator	<input type="text"/> (Max.255 characters)

Protocol

TCP/IP	Enable
NetBEUI	Disable ▾
NetBIOS over TCP	Enable ▾
NetWare	Disable ▾
EtherTalk	Disable ▾

7 - CLICK ON LIST

The screenshot shows the OKI ES5462 MFP web interface. At the top left is the OKI logo. Below it is the device name 'ES5462 MFP' and two buttons: 'Refresh' and 'Status Window'. A navigation bar contains links: 'View Info', 'Paper Setup', 'List', 'Admin Setup', 'Job List', 'Direct Print', 'Transmission Settings', and 'Links'. The 'List' link is highlighted with a red arrow from the instruction '7 - CLICK ON LIST'. On the left is a 'View Information' sidebar with a tree view containing: Status, Counter, Supplies Life, Usage Report, Network, and System. The main content area is divided into three sections: 'Information', 'Version Information', and 'Remaining Toner'. The 'Information' section contains a table with fields: Device Name (OKI-ES5462MFP-86239D), IP Address (192.168.1.11), MAC Address (00:25:36:86:23:9D), Location, Serial Number (AK28062208), Asset Number, Contact Name (- Administrator), Tray1 (Letter), MP Tray (A4), Duplex (Installed), SD Memory Card (Installed), and Memory (256 MB). The 'Version Information' section contains a table with fields: CU (02.37), PU (00.07.09), Network Firmware (01.06), Web Remote (01.00), and Web Language (01.00). The 'Remaining Toner' section shows four progress bars: Black (100%), Cyan (70%), Magenta (70%), and Yellow (70%). To the right of these sections are two tables: 'Print Service' and 'Setting Service', both with columns for the service name and an 'Enabled' status (indicated by a green dot or a radio button).

Information	
Device Name	OKI-ES5462MFP-86239D
IP Address	192.168.1.11
MAC Address	00:25:36:86:23:9D
Location	
Serial Number	AK28062208
Asset Number	
Contact Name - Administrator	
Tray1	Letter
MP Tray	A4
Duplex	Installed
SD Memory Card	Installed
Memory	256 MB

Version Information	
CU	02.37
PU	00.07.09
Network Firmware	01.06
Web Remote	01.00
Web Language	01.00

Print Service	
Service	Enabled
LPR	<input checked="" type="radio"/>
Port9100	<input checked="" type="radio"/>
FTP	<input type="radio"/>
IPP	<input type="radio"/>
NetWare PServer	<input type="radio"/>
NetWare RPrinter	<input type="radio"/>
EtherTalk	<input type="radio"/>
NetBEUI	<input type="radio"/>

Setting Service	
Service	Enabled
SNMP	<input checked="" type="radio"/>
WEB	<input checked="" type="radio"/>
Telnet	<input type="radio"/>
NetBEUI	<input type="radio"/>

Copyright ©2011 Oki Data Corporation. All rights reserved.

8 - CLICK ON NEW

The screenshot shows the OKI ES5462 MFP web interface. At the top left is the OKI logo. Below it is the device name 'ES5462 MFP' and two buttons: 'Refresh' and 'Status Window'. A navigation bar contains links: 'View Info', 'Paper Setup', 'List', 'Admin Setup', 'Job List', 'Direct Print', 'Transmission Settings', and 'Links'. The 'List' link is highlighted with a red arrow from the instruction '8 - CLICK ON NEW'. On the left is a 'View Information' sidebar with a tree view containing: Profile and NetworkScan. The main content area is divided into two sections: 'Profile' and 'Profile List'. The 'Profile' section contains three buttons: 'New', 'Delete', and 'Edit'. The 'Profile List' section is a large empty box. At the bottom of the main content area is a 'Profile Counter' showing '0 / 50'.

Profile		
New	Delete	Edit

Profile List:

Profile Counter 0 / 50

Profile Settings

Profile Name	<input type="text"/> (Max.16 characters)
Protocol	CIFS ▾
Target URL	<input type="text"/> (Max.144 characters) Example: \\TESTCOMPUTER\TEST
Port Number	445 (1-65535)
User Name	<input type="text"/> (Max.32 characters)
Password	<input type="password"/> (Max.32 characters)
CIFS Character Set	UTF-16 ▾
Encode Communication	None ▾

[» Detail](#)

Press Submit to send changes. Press Cancel to clear changes.

9 - ENTER A PROFILE NAME
ie. Scan to Desktop

10 - ENTER THE
DESTINATION IN THE
FOLLOWING FORMAT

\\'FRONTDESK'\SCANS'

'FRONTDESK' = COMPUTER
NAME

'SCANS' = SHARE NAME

11 - ENTER A USERNAME
AND PASSWORD (if none is
required use Guest as the
username and leave
password blank)

12 - CLICK ON SUBMIT